




M.KO motor container



M.KO Motor container for distribution traffic.

Fittings

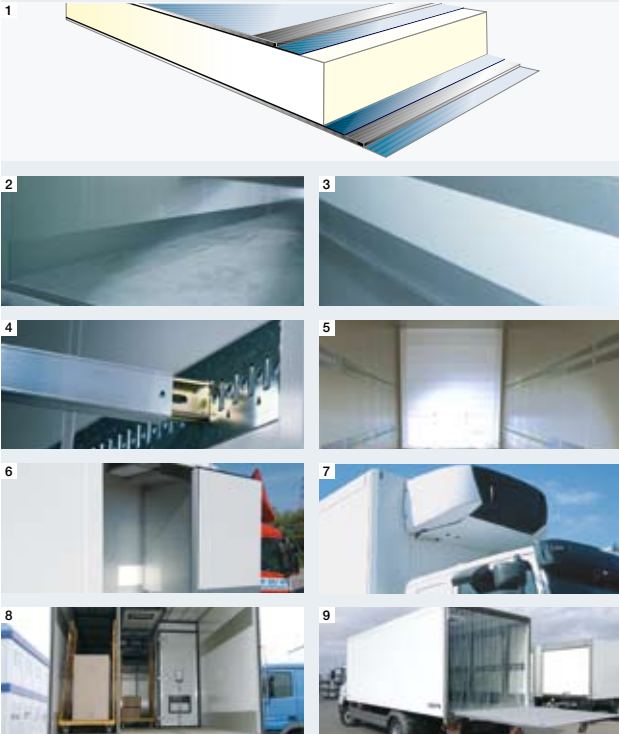

Fittings

FERROPLAST®: The multi-coated steel panelling is and remains tight, insulates better and is repair friendly.

Aluminium floor well: The liquid tight aluminium floor well protects against moisture and liquids.

Aluminium scuff rail: The aluminium scuff rail is glued to the side wall tight and without rivets and can be cleaned hygienically.

Load securing rails: For a bigger load and easier cargo securing.

Bulkhead: The bonded bulkhead prevents "thermal bridges" and ensures reduced loss of cooling energy.

Side door: Using a side door, the loading compartment can be unloaded and loaded just how you want.

Refrigeration unit: Whether you need an under floor refrigeration unit or a refrigeration unit mounted on the bulkhead! We have the solution.

Partitions: Make several vehicles from one. Easy to displace, foldable and cost-effective.

Further fitting options: The strip curtains means that you can unload without having to open the whole cargo compartment up. This keeps the loss of cold air to a minimum. The tail lift makes loading and unloading easy.

just more.

Trailer

Services

Technology



M.KO Motor container for distribution traffic.

Ferroplast FP 45 COOL

Chassis

Tractor cab	short F07	short F07
Wheelbase (A)	4,160 mm	4,760 mm
Total length incl. body and LBW	8,315 mm	9,515 mm
Frame height incl. floor	310 mm	310 mm
Centre FA up to the front edge of the body	390 mm	390 mm
Tyres	265/70R19.5	265/70R19.5
Original rear frame overhang	1,885 (2,285) mm	2,285 (2,685) mm
Permitted gross vehicle weight	11,990 kg	11,990 kg

Body

Internal body length (B)	6,050 mm	7,250 mm
Internal body width	2,490 mm	2,490 mm
Internal body height (C)	2,400 mm	2,400 mm
Usable body length	6,050 mm	7,250 mm
Usable body height	2,400 mm	2,400 mm
Internal side door width	1,300 (900) mm	1,300 (900) mm
Internal side door height	2,150 mm	2,150 mm
Side door from the inside edge of the bulkhead	1,200 mm	1,200 mm
Unladen weight, complete +/- 3%	3,080 kg	3,382 kg
External overall length	6,190 mm	7,390 mm
Body width, over all	2,600 mm	2,600 mm
Internal rear door height	2,390 mm	2,390 mm
Internal rear door width	2,490 mm	2,490 mm
Bulkhead thickness	53 mm	53 mm
Side wall thickness	45 mm	45 mm
Rear door thickness	80 mm	80 mm
Roof thickness	125 (85) mm	125 (85) mm
Floor thickness	126 mm	126 mm

Ferroplast FP 60 COOL

Chassis

Tractor cab	short F07	short F07
Wheelbase (A)	4,160 mm	4,760 mm
Total length incl. body and LBW	8,315 mm	9,515 mm
Frame height incl. floor	310 mm	310 mm
Centre FA up to the front edge of the body	390 mm	390 mm
Tyres	265/70R19.5	265/70R19.5
Original rear frame overhang	1,885 (2,285) mm	2,285 (2,685) mm
Permitted gross vehicle weight	11,990 kg	11,990 kg

Body

Internal body length (B)	6,050 mm	7,250 mm
Internal body width	2,460 mm	2,460 mm
Internal body height (C)	2,400 mm	2,400 mm
Usable body length	6,050 mm	7,250 mm
Usable body height	2,400 mm	2,400 mm
Internal side door width	1,300 (900) mm	1,300 (900) mm
Internal side door height	2,150 mm	2,150 mm
Side door from the inside edge of the bulkhead	1,200 mm	1,200 mm
Unladen weight, complete +/- 3%	3,100 kg	3,405 kg
External overall length	6,190 mm	7,390 mm
Body width, over all	2,600 mm	2,600 mm
Internal rear door height	2,390 mm	2,390 mm
Internal rear door width	2,460 mm	2,460 mm
Bulkhead thickness	53 mm	53 mm
Side wall thickness	65 mm	65 mm
Rear door thickness	80 mm	80 mm
Roof thickness	85 mm	85 mm
Floor thickness	126 mm	126 mm

All details in approx. dimensions in mm
Issued: 20.08.2008

